

Applus+
laboratories

Measurement of sound absorption in a reverberant chamber.
UNE-EN ISO 354: 2004

AIDIMME
INSTITUTO TECNOLÓGICO

Test for fire resistance.
UNE EN 13501-1:07+A1:2010

tecnalia Inspiring Business

Slip test / slipperiness of the pavements.
UNE-ENV 12633: 2003

AIDIMME
INSTITUTO TECNOLÓGICO

Artificial aging test.
UNE-EN 1062-11: 2003
UNE-EN 1062-11: 2003 / AC: 2005

AIDIMME
INSTITUTO TECNOLÓGICO

Permeability to water vapor.
UNE-EN ISO 7783: 2012

AIDICO
INSTITUTO TECNOLÓGICO DE LA CONSTRUCCIÓN

Test capillary absorption and water permeability.
UNE-EN ISO 11507: 2007

AIDIMME
INSTITUTO TECNOLÓGICO

Resistance to high temperature.
UNE-EN 1062-11: 2003
UNE-EN 1062-11: 2003 / AC: 2005

AIDICO
INSTITUTO TECNOLÓGICO DE LA CONSTRUCCIÓN

Verification of the effectiveness of the encapsulation of fiber cement with asbestos.
UNI-10686

aitex
textile research institute

Test of the determination of resistance and thermal conductivity.
UNE-EN 12667: 2002

AIDIMME
INSTITUTO TECNOLÓGICO

Adhesion by traction direct.
UNE-EN 1542: 2000

CE
17
(Nº. DdP: 01 / 02 / 03)
EN 1504-2

Notified body for European regulation of Construction Products Nº 305/2011 with the number 1981.

AIDIMME- Technological Institute Metalworking, Furniture, Wood, Packaging and Allied.



Application in numerous supports such as: clay tiles, wood, galvanized iron, fiber cement, concrete, stoneware, slate, etc.

* Consultation of the test certificates upon request to our technical department.

THE ACCOMPANYING BROCHURES FEATURE A 10 - 15 YEARS COMMERCIAL WARRANTY.

RESIDENTIAL WARRANTIES, WHICH ARE NOT SHOWN ARE FOR 25 YEARS.

SUPERLEV

NATURAL SPRAYED CORK



EAGLE INDUSTRIAL SERVICES LLC.

825 Town & Country Ln.
Suite 1200
Houston, TX. 77024

Authorized distributor


C5 CORK ARMOR

Danny Chalker

Tel. #: 936-465-3136

This catalogue is merely informational and has been prepared based on our experience. Due to the variety of surface characteristics, application possibilities and other influential factors, for which we cannot accept any responsibility, this publication will lose its validity with a subsequent publication.

Not subject to hazardous product identification standards.

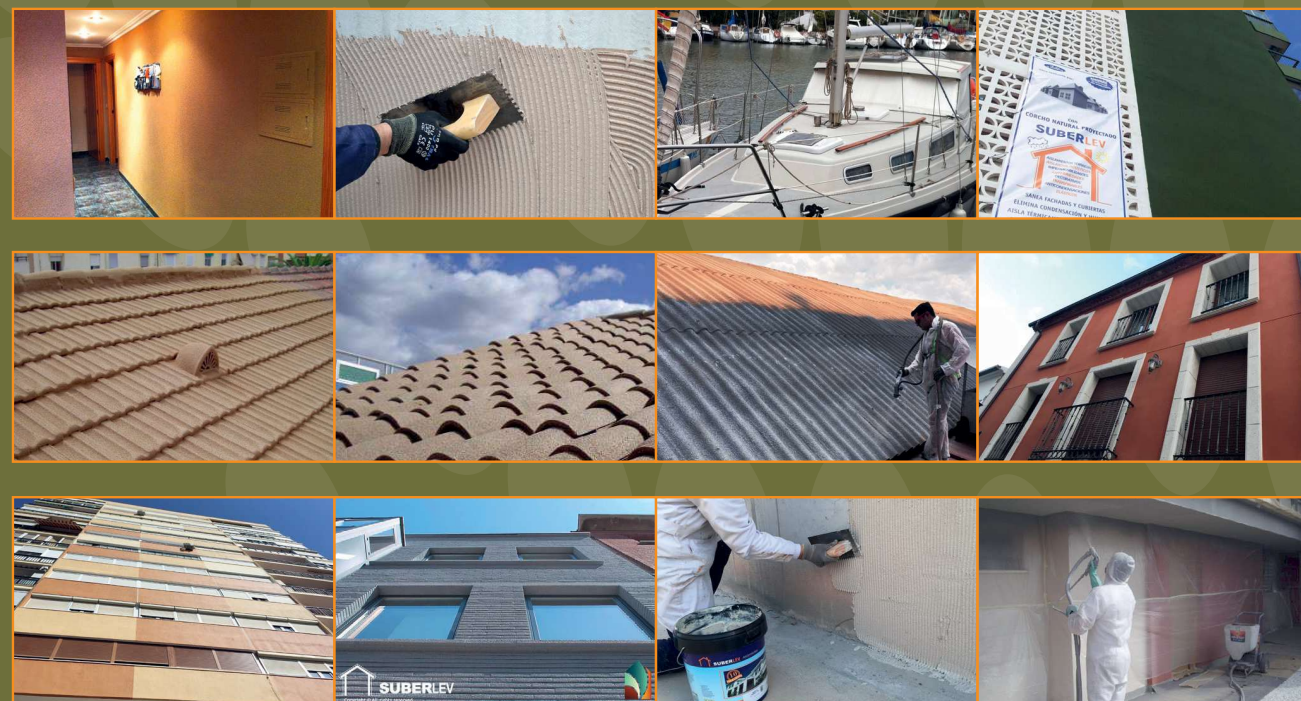



thermal
corrector



acoustic
corrector



waterproof



elastic



breathable



fireproof



anti-slip



durable



ecological



excellent
adhesive

NATURAL SPRAYED CORK

High quality natural thermal coating

Coating in thin layer and without joints, **natural**, **non-toxic**, **breathable** and **biodegradable**. Formulated based on sterilized granules (vaporized) of natural cork, resins of first quality without solvents and organic dyes of high stability to the outside.

AVERAGE PARTICLE SIZE: 0,40 mm – 0,90 mm.

Specific for thermal correction and waterproofing in roofs and facades, or asbestos fiber encapsulation.

FINISHES

- It can be sanded, filled, varnished, painted, rendered or left as it is applied.
- Two different granulometries, according to the need for application.

AVERAGE PARTICLE SIZE: 0,10 mm – 0,40 mm.

Fine granulometry with greater breathability to avoid humidity by capillarity, acoustic correction in interiors.

SUPPORTS

- Concrete, cement, plaster, plasterboard, fiber cement, wood, galvanized steel, mortar, ceramic brick, natural stone, corrugated sheet, expanded polystyrene (EPS), extruded polystyrene (XPS), monolayer mortar, PVC ...
- Paints and coatings in good condition and with good adhesion to the support.



NATURAL SPRAYED CORK

For roofs and façades

APPLICATION: gun or suitable projection machine.

EQUIVALENCE: 1 kg of product = 1,30 mm thickness / m².

EFFICIENCY: From 6 to 10 m2 finished per 18 L container (depending on the support and application required).

PRESENTATION: Chart of 28 colors and NCS chart on request.

Bucket of 12 kg (18 L approx.).

FINE NATURAL SPRAYED CORK

For façades and interiors

APPLICATION: gun or suitable projection machine.

EQUIVALENCE: 1 kg of product = 1,15 mm thickness / m².

EFFICIENCY: From 7 to 11 m2 finished per 18 L container (depending on the support and application required).

PRESENTATION: Chart of 28 colors and NCS chart on request.

Bucket of 12 kg (18 L approx.).

SUBER-PAINT

For roofs and façades

APPLICATION: Brush, roller or suitable projection machine.

EQUIVALENCE: 1 kg of product = 1,15 mm thickness / m².

EFFICIENCY: 600 mL/ m² - 2 L/ m². (depending on the support and application required).

PRESENTATION: Off white. Projected natural cork chart, NCS chart.

Bucket of 4 L and 15 L.

THERMAL FILLER

For exteriors and interiors

APPLICATION: Trowel, spatula, or adequate projection machine.

EQUIVALENCE: 1 kg of product = 1,25 mm thickness / m².

EFFICIENCY: 2 kg/ m². (depending on the support and application required).

PRESENTATION: Natural cork color.

Bucket of 4 L and 15 L.